

LED STREET Light SLF



PRODUCT ADVANTAGE

GOOD QUALITY VISIBLE



Horizontal installation or vertical installation





SLF-200W LED STREET Light

Product Image




SLF-200W LED STREET Light


Technical Parameter


Product number	SLF-200W		
Input power	200W		
Lamp beads	Philips SMD3030 (320 Pcs)		
Light effect	130LM/W Or 170LM/W		
Input voltage	AC85-265V	Surge	≥6KV
Power factor	PF≥0.95	ССТ	2700-6500K
Power supply	CE Or Meanwell	CRI	Ra≥70
Size	654*280*98mm		
KG	6.5KG		
Colour	Grey		
Power cord	Brown L Fire Wire		
	Yellow G ground wire		
	Blue N ground wire		
Beam angle	T3/T4/T5		
Protection level	IP66	Material	ADC12 die-cast aluminum
Service life	50000Hours	Temperature	-30°C - +55°C
Certificate	CE RoHS	Warranty	5 years

SLF-200W LED STREET Light

Product Size

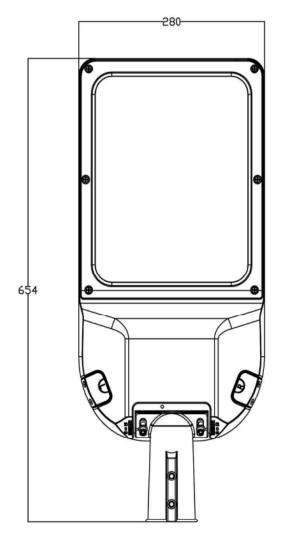

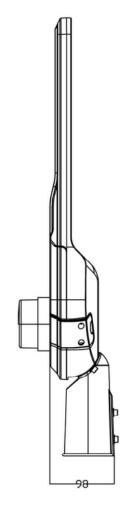



★Instructions for use

- 1. This item working voltage is AC85-265V/AC 50/60 Hz, please don't exceed the working range voltage;
- 2. Since the lamp has a PC lens accessory, please handle it lightly when move & storage, please do not press hardly.

★Installation instructions

- 1. There are 3 installation methods for the product, please check the following diagram to complete the installation;
- 2. Working environment temperature -30 \degree -+ 55 \degree ;
- 3. When installing the lamps, all the wires should be sealed to prevent leakage;
- 4. When connecting an external power cord, corresponding waterproof and water leakage measures must be taken;
- 5. Anti-glare design, uniform light distribution;
- Independent power box design, which is beneficial to the heat dissipation of the lamp body, reduces light attenuation and prolongs the service life of the light source;
- 7. Support light sensor installation, can realize intelligent control of lamps, Improve energy efficiency.



★ Maintenance instructions

- 1. Make sure power is off before maintenance;
- 2. Periodically clean the PC lens of the luminaire to maintain the high transmittance of the luminaire;
- 3. Regularly clean the lamp housing and the radiator dust to maintain good heat disspation;
- 4. Be careful not to use strong corrosive solutions for cleaning.

★Warranty & After-sales service

- 1. This item with full warranty 5 years, under normal conditions of use, quality assurance is based on the correct storage, installation, use and maintenance of the product;
- 2. Product damage caused by improper installation and use and violation of product operating procedures is not covered by the warranty;
- 3. For quality problems during the warranty period, our company will fix, replace (parts) or replace new products, Materials and labor costs will be appropriately charged beyond the warranty period.